EMAIL COMPLETED FORM TO
SALES@MOBILITYINNOVATIONS.COM

MILFORD ASSESSMENT FORM

Customer Details

Height:_____ Weight: _____ Age: _____ Patient Name _____

Sling Types & Size (specialty slings cost extra)

***please note slings are non-returnable unless unused & in their original condition**

Standard	Double Amputee	Net/Mesh	Fleece Lined	Head-Supported
XS S M L XL	S M L (Upcharge)	S M L (Upcharge)	M L (Upcharge)	S M L (Upcharge)

Sling Size Guide

	HEIGHT															
height in ft.	3ft	3ft 3in	3ft 6in	3ft 9in	4ft	4ft 3in	4ft 6in	4ft 9in	5ft	5ft 3in	5ft 6in	5ft 9in	6ft	6ft 3in	6ft 6in	6ft 9in
weight in lbs.		X SMALL			SMALL			MEDIUM			LARGE			X LARGE		
56																
63																
70																
77																
84																
91																
98																
105																
112																
119																
126																
133																
140																
147																
154																
161																
168																
175																
182																
189																
196																
203																
210																
217																
224																
231																
238																
245																
252																
259																
266																
273																
280																
287																
294																
301																
308																
315																
322																

*Max weight capacity is 330lbs

MILFORD ASSESSMENT FORM

Vehicle Details

Make: _____ Model: _____ Year: _____

Installation Position:

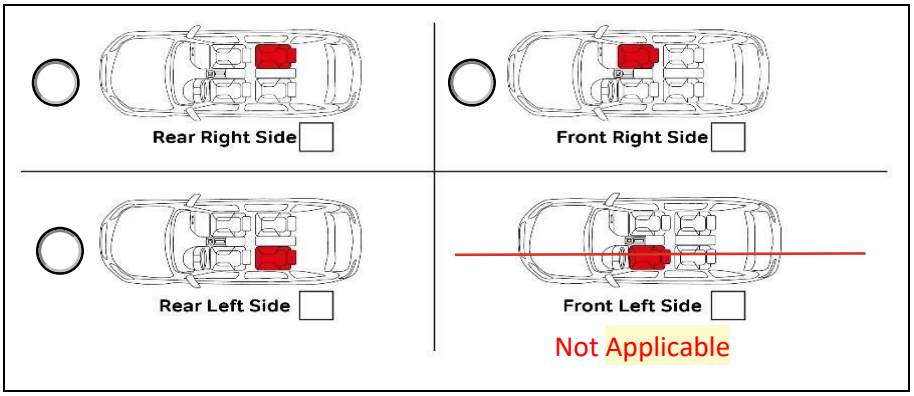

Passenger Side = Front Right Side
Rear Passenger Side = Rear Right
Side Rear Driver Side = Rear Left Side

Please provide the four measurements **(in inches)** below:

A: From the ground to the top of the sill.

A = _____

B: From the ground to the depression in seat.

B = _____

X: From the ground to the top of wheelchair seat.

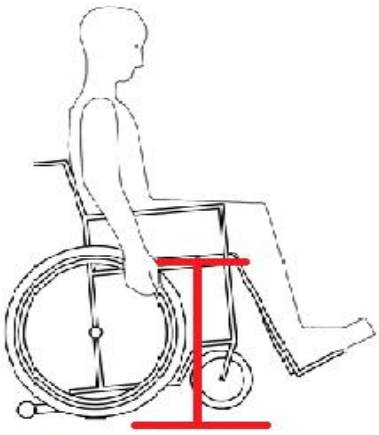

X = _____

Y: From the ground to the middle of sternum - **Seated as upright as possible for accuracy**

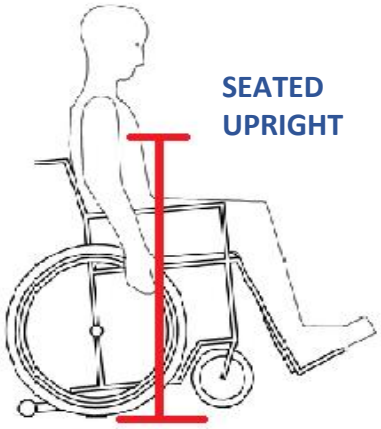

Y = _____

Sill Brackets are used on vehicles that have a low dash or to retain the use of the glovebox. This is typically used in smaller vehicles and will need to be removed before closing the vehicle door.

*Using a Sill Bracket will reduce the weight capacity by 55lbs., minimize foot/leg space & can not be used with vehicle specific applications (unless designed in conjunction)

Does the vehicle need a Sill Bracket?

Yes ◯ No ◯

Sill Bracket

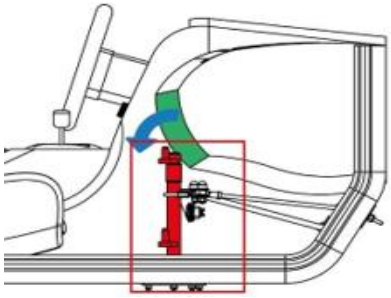

If Mounting Post will obstruct the glove box, a Sill Bracket is recommended.

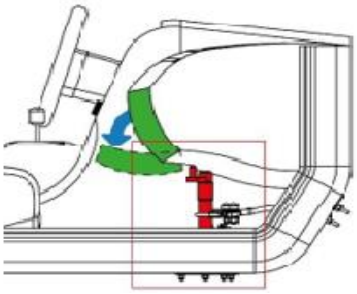

If there is less than 7” of space from the door sill to the bottom of the dash, a Sill Bracket is required.

MILFORD ASSESSMENT FORM

Other Options & Accessories

Spreader Bar

A Spreader Bar is included with your Milford Order

Sm (11.25”) ____ Med (13.5”) ____ Lg (17.5”) ____

The Spreader Bar should be at chest height when lifting the client. In some cases, a protective padded cover may be appropriate for the client.

Spreader Bar Covers are additional cost

Spreader Bar Cover: Yes ____ No ____

Another way to use your Milford!

Milford Wall Bracket

The Wall Bracket allows your Milford to operate from a fixed position in the home where space is tight. After securely mounting the Wall Bracket to a load-bearing wall, the Milford can help with transfers from wheelchairs to bathtubs, stairlifts to wheelchairs, and anything in between.

Wall Brackets must be mounted on a load-bearing stud wall and may require reinforcement in certain situations.

Rechargeable battery pack not included (must be ordered separately).

If you would like to include Wall Brackets with your order, please let us know by requesting a Wall Bracket Assessment Form.